



HYDROTAP G5 BC40 CLASSIC PLUS BRUSHED CHROME



BOILING

CHILLED

FILTERED

Order Code H55703Z01AU

Zip HydroTap Classic Plus Boiling, Chilled, Filtered water features simple, intuitive controls including continuous flow to fill bottles, Boiling water safety lock, and SteriTouch® antimicrobial protection impregnated within the new Classic Plus touch-pad for enhanced hygiene. The water system features a single under bench command centre including full colour interactive touch screen display with pin code protection and customisable settings including 2 boiling water safety modes, 3 energy saving modes including ON/OFF timers and sensor activated 'sleep when it's dark', 'Quiet' mode with automated intelligent fan speed adjustment, SteriTouch® antimicrobial protection impregnated into key water paths for enhanced hygiene, 100% water efficient air cooled technology, and 0.2 micron water filtration. Easy to install integrated ventilation tray included.



| | |
|--------------------|-------------|
| Manufacturing Code | H55703Z01AU |
|--------------------|-------------|

| | |
|----------|------------|
| Capacity | Commercial |
|----------|------------|

| | |
|-----------------------|-----|
| Boiling Cups per hour | 160 |
|-----------------------|-----|

| | |
|-----------------------|-----|
| Chilled Cups per hour | 125 |
|-----------------------|-----|

| | |
|-----|--|
| Tap | Zip HydroTap CLASSIC PLUS Tap (Brushed Chrome) |
|-----|--|

| | |
|----------------|-------------------------|
| Water Pressure | Min 170kPa - Max 700kPa |
|----------------|-------------------------|

| | |
|------------------|-----------------|
| Water Connection | 1/2" BSP (G1/2) |
|------------------|-----------------|

| | |
|---------------------------|------|
| Water Supply Requirements | Cold |
|---------------------------|------|


| | |
|--------------------------|--|
| Water Valves | Integrated 500kPa Pressure limiting valve and Dual Check Valve |
| Power Rating | 1.97kW 220-240V 50Hz |
| Power Supply | 1 x 10 Amp socket outlet |
| Dimensions | W395mm x D464mm x H333mm |
| Product Approvals | WaterMark, RCM, ARC |
| Warranty | 5 years (appliance warranty 36 months plus additional 24 months tank warranty) |

Installation Requirements

'1. Installation and connection of your Zip HydroTap must be carried out by a qualified person, observing national and local regulations. 2. You will require suitable mains electrical and drinking water connections, plus waste water drainage all within 1.5 metres of the product. 3. HydroTap is air-cooled so discrete cabinetry cut-outs are required for ventilation. 4. Installation on most bench tops is straightforward however some stone bench tops may require a specialised cutting service. 5. If you live in a hard water area, we recommend installation of a Zip scale filtration kit. 6. Installation by Zip Professional Service can be arranged with a phone call or through www.zipwater.com'

Installation Detail

BKLZ HydroTap G5 v1.01 03.21 BC40 BC60

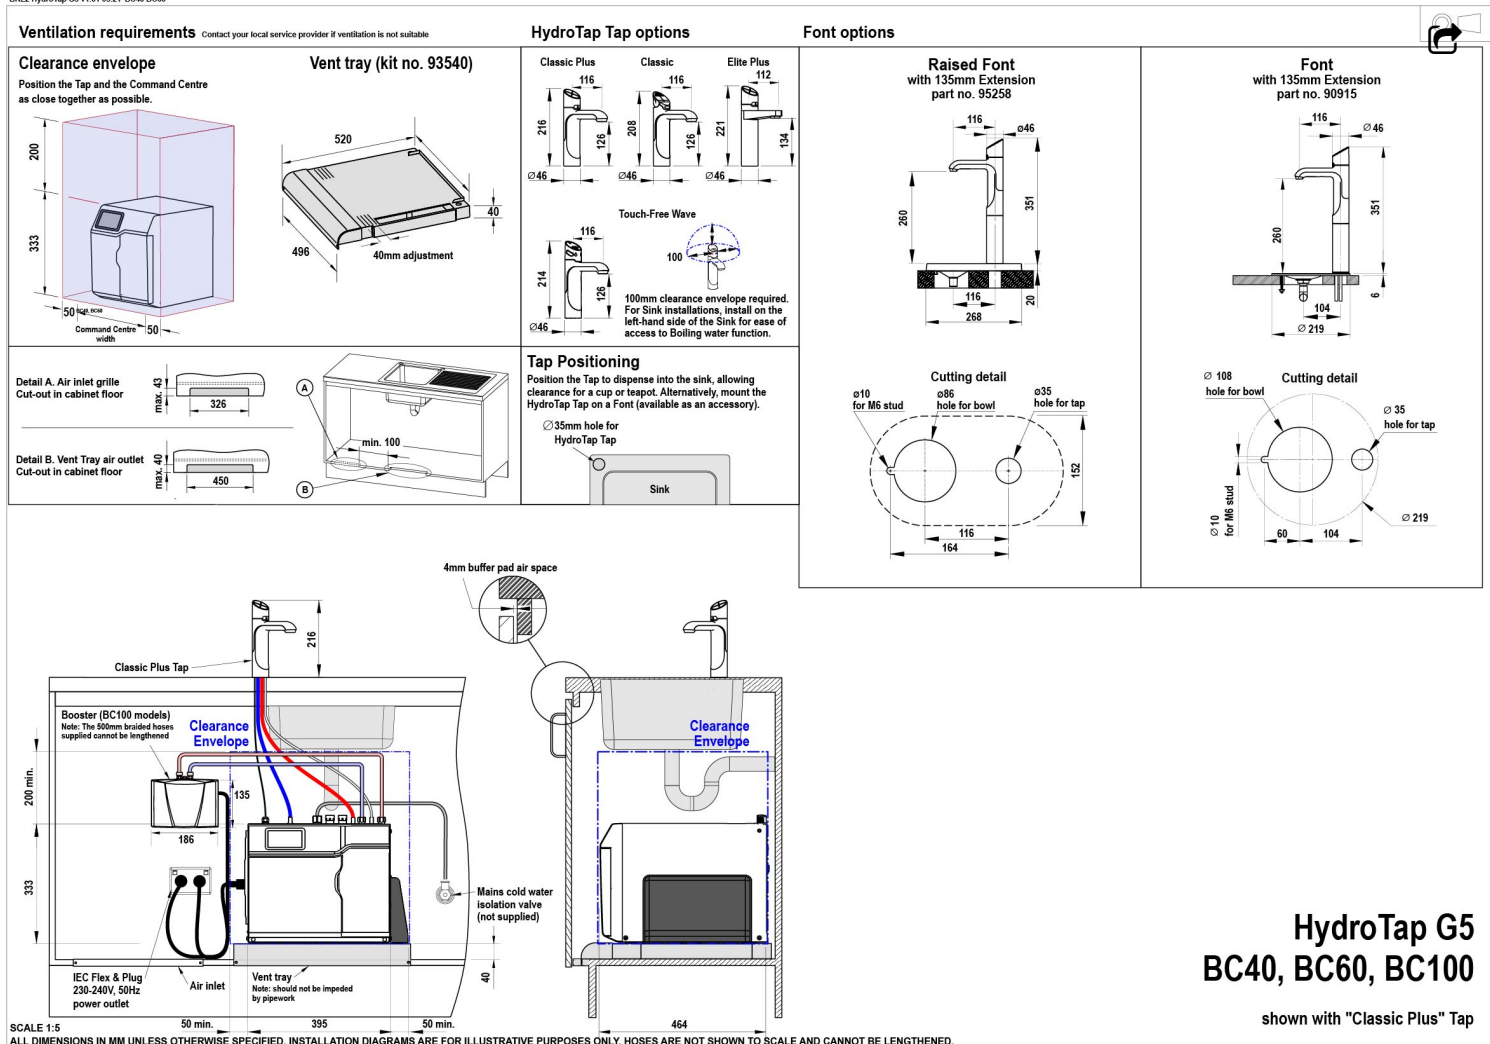

HydroTap G5
BC40, BC60, BC100

shown with "Classic Plus" Tap

